

# SOLID 45ET



MAXIMUM  
PERFORMANCE FOR  
SMOOTH PRODUCTION  
AND LOGISTICS  
PROCESSES

## 8-Inch-Tractor-Thermal Printer for the Toughest Continuous Operation

### HIGHLIGHTS / FEATURES / SPECIAL ATTRIBUTE

- Fast interruption-free printing or two formats with optional Dual Tractor system
- Completely trouble-free paper handling
- First page after just 2 seconds
- Up to 45 pages per minute
- SAP® and AS/400 compatible through PCL5+JetCAPS as well as LAN-IPDS
- Compatible with standard laser printers

### FIELD OF APPLICATION

- Stickers, labels and tags up to DIN A4
- Top sheet printing in the newspaper industry
- Fast real-time or batch processing
- Suitable for the toughest continuous use




## Print Engine

<b>Print technology</b>	Thermal transfer/direct thermal harmonic (history-controlled near-edge print head)
<b>Controller</b>	MPC 5.3
<b>Print speed</b>	up to 45 pages/min
<b>Print resolution</b>	300 dpi x 300 dpi
<b>Lifetime print head</b>	Transfer: up to 50.000 m Direkt: bis zu 25.000 m
<b>Power supply</b>	110/240 VAC autoselect
<b>Power consumption</b>	3,2 A
<b>Dimensions (WxDxH in mm)</b>	490 x 760 x 305 mm
<b>Weight</b>	30 kg
<b>Environment temperature</b>	5 - 35°C
<b>Relative humidity</b>	45 - 75 % (rel., non-condensing)
<b>Interfaces</b>	USB, RS232, RS422 IEEE 1284 Ethernet-interface 10/100 MBit, bi-directional (TCP/IP)
<b>Memory</b>	RAM: 64 MB Flash: 16 MB



## Printable Media

<b>Size</b>	
<b>Width</b>	110 - 240 mm width printable width 213 mm
<b>Weight</b>	max. 120 g/m <sup>2</sup> at suitable quality up to 160 g/m <sup>2</sup>
<b>Paper thickness</b>	0.2 - 0.9 mm
<b>Thermal transfer</b>	
<b>ribbon</b>	roll diameter max. 90 mm
<b>core diameter</b>	1 inch (25.4 mm)
<b>ribbon length</b>	max. 600 m
<b>Coated side</b>	inside (outside possible)
<b>Ribbon width</b>	40 - 217 mm

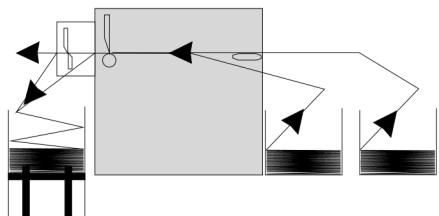

## MPC 5.3 High-End Print-Controller

### Emulations

MICROPLEX IDOL, HP-PCL5/ HPGL, IGP/PGL, AGFA Reno, LN03+, BULL-MP6090, Datamax, Etimark MP-1220, TEC BX72, TEC B6xx, LDC, ZPL II, EPL2, Intermec Direct Protocol, IER Command, Godex EZPL, Diablo 630, IBM Proprieter, Epson FX-80, MT-600/MT40, IDS, ANSI Genicom, TIFF, HP Designjet, XML (SAP® RFID), CUPS Raster

### Optional Emulations

μ-Postscript, CODE-V (Magnum), XEROX XES, KODESCRIPT+, Prescribe/PSB 2, Datamax, Labelpoint, IPDS, cab, AEA, (more emulations on request)

### Barcodes

QR Code, EAN 8, 13, 128, add on, 2/5 3-stroke Datalogic, 2/5 3-stroke Matrix, Codabar, PDF 417, Royalbar, Planet, Jetcaps (HP/SAP), Code 39, 128 MSI, UPC A, E, Postnet, KIX, USPS One Code

### Optional Barcodes (Barcode 2)

USD5, Aztec-Code, UPS-Maxicode, Datamatrix (more barcodes on request)

### Additional functions

<b>Network capabilities</b>	authentication standard IEEE 802.1X
<b>Intelligent barcode generation</b>	on-the-fly in the printer
<b>Format splitting</b>	in several subformats by command
<b>Ribbon Save Mode</b>	active from 12 mm unprinted length, to save ribbon

### Optional functions

#### Integrated form management (RFM)

Forms and fonts can be stored in the flash memory and can be accessed when needed.

#### Status-Out

Gives notice of each correctly printed page via interface. Further features can be found in the manual.

#### Programmable GPIO-Interface (SPS-Control)

EMBEDDED INTELLIGENCE – Enabling two-way communication between printer and a PLC.

Integration of the printer into production lines is possible, controlled by GPIO-interface.

Customer / Application specific modifications possible.

## Paper Path

### Input

Continuous  
internal from roll, external, e.g. fanfold

### Optional

dual tractor version as factory option (SOLID 45ET-2)  
sensor for backside marking

### Optional

Single / Job cutter



Let's get in touch!

info@globalis.com

[www.globalis.com](http://www.globalis.com)

Latin America & The Caribbean

[www.alistech.ae](http://www.alistech.ae)

Middle East, Africa & Asia

globalis  
international

alistech